
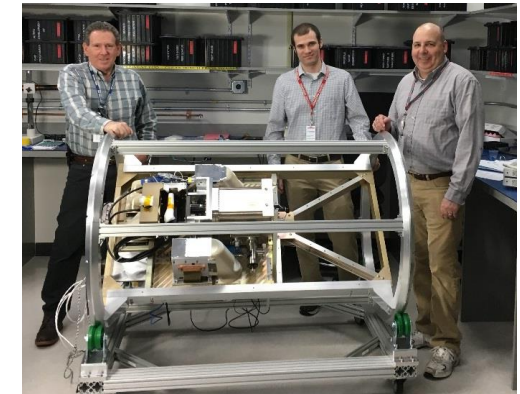


MISTiC™ Winds

A NASA Instrument Incubator Program


An Affordable System of Systems
 Approach for the Observation of
 Atmospheric Dynamics

April, 2018

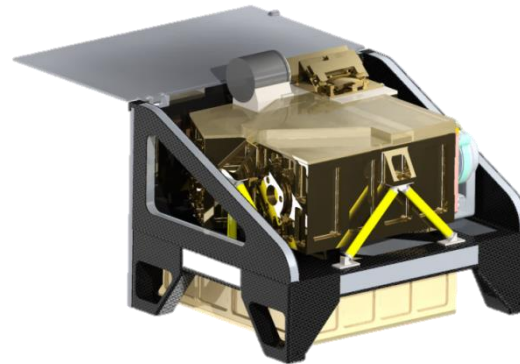

MISTiC™ Winds

- Provides High Spatial/Temporal Resolution Temperature and Humidity Soundings of the Troposphere
 - Atmospheric State and Motion
 - Improved short term weather forecasting
- Enabled by:
 - LEO Constellation Approach
 - Micro-Sat-Compatible Instrument
 - Low-Cost Micro-Sat Launch

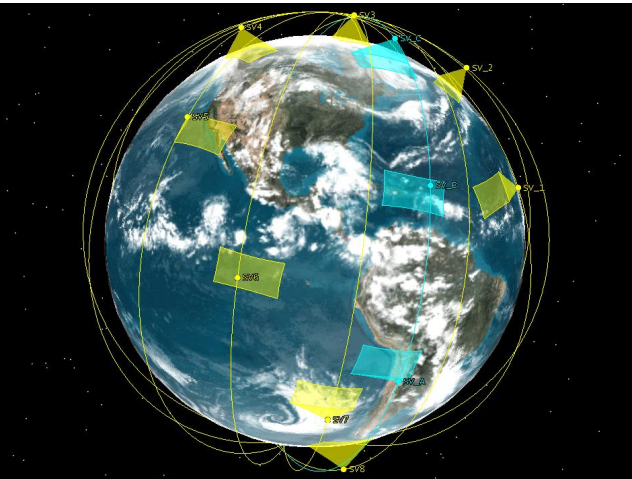

NASA ESTO IIP PI:

Kevin R. Maschhoff,
 BAE Systems

Science Team:

H. H. Aumann JPL
 J. Susskind NASA GSFC

Topics


- Instrument Concept and Mission Concept Summary
- Instrument Physical Concept Update
- Risks Reduction Progress
 - FPA Radiation Test Summary
 - Spectrometer and Airborne Instrument Build
 - **Airborne HSI AMV Winds Observation Demonstration –Initial Observations**
- Next Steps
- IIP Summary

MISTiC™ Winds- Two Affordable Measurement Concepts to Reduce Weather Forecasting Errors

- MISTiC™ Winds Temperature and Humidity Sounding Constellation Options.
 1. Frequent-Sounding Constellation
 - e.g. 90 min refresh-globally.
 2. Wind-Vector Formations
 - e.g. 4 3-Satellite Formations for Cloud-Drift and Water Vapor Motion-Vector Winds
 - Provide 3-Hr Refresh for 3D Winds *and* Atmospheric Soundings (T, H₂O)

Miniature Spectrometers Operated in Constellations Offer Lower Cost /Lower Risk Approach than GEO for Frequent-Refresh IR Soundings & 3-D Winds


Motion-Vector Winds Formation (blue)

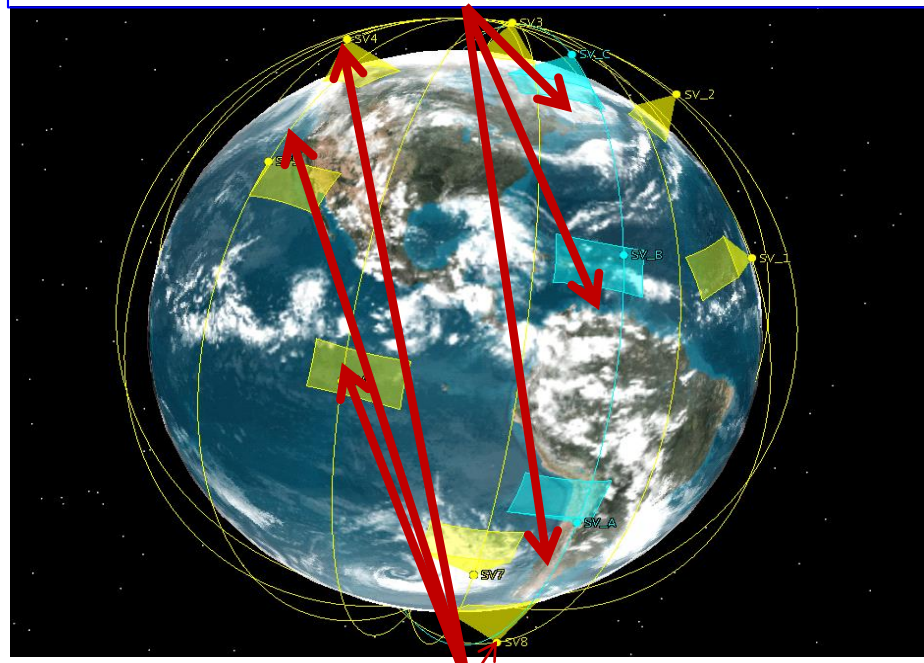

90 min Refresh of IR Soundings Provided by Spectrometers in 8 Orbital Planes (gold)

LEO orbit and SWIR/MWIR-only Spectra Enables MISTiC™ Instrument SWaP Reduction of 1-2 Orders of Magnitude


- Size Drivers
 - Geo-Stationary Imagers /Sounders Driven by Orbit Radius
 - IR Sounders Driven by # of Channels and LWIR Band Cooling
- **Moving MISTiC™ to a LEO orbit and eliminating LWIR channels enables massive reduction in SWaP**
 - Current concept is 60-125X less volume than Sounders proposed for GOES-R
 - Reduce power demand with an advanced FPA technology that won't require as much cooling
- IIP Instrument Concept Design
- Baseline envelope consistent with hosting on a 50 kg ESPA-Class Microsatellite
 - “Objective” Envelope consistent with 27U Cube sat Envelope (about 1 cubic foot of spacecraft volume)
- **Small instrument size depicted continues to be feasible as instrument concept fidelity increases**

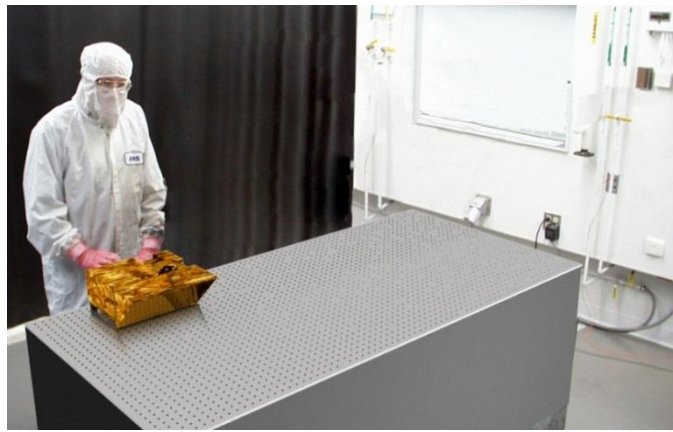

Artist's Rendering Depicts a MISTiC™ Instrument, for Comparison to AIRS


Achieve Reduced SWaP by Reducing Number of Spectral Channels to the Mid IR only-*Sufficient to Sound the Dynamic Portion of the Atmosphere*

IASI Tropical Spectrum (Nyquist Sampled)

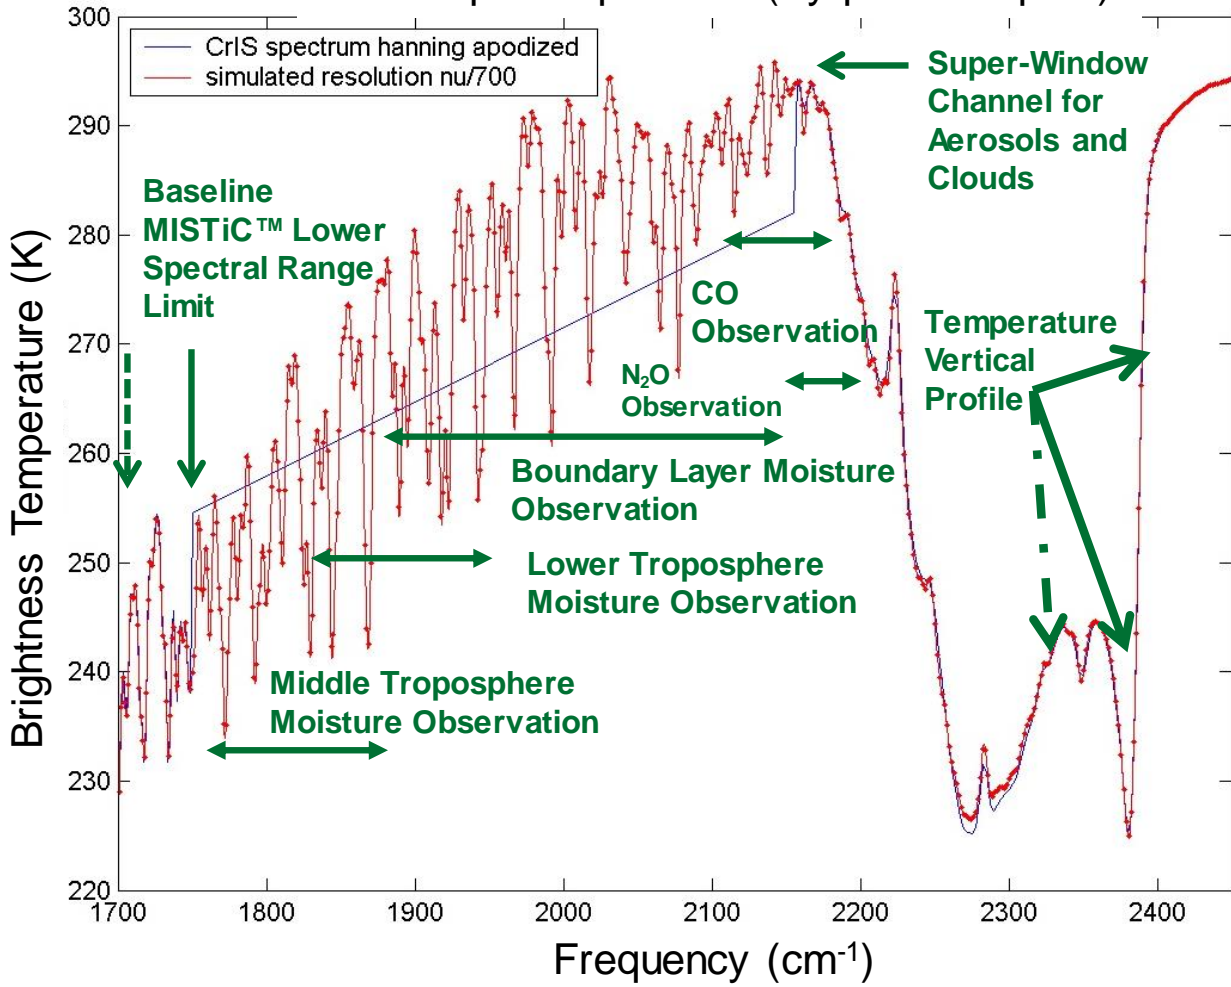

- SWIR Coverage at NE ΔT and Δv Sufficient for CO₂ R-Branch Temperature Sounding of Surface to Upper Troposphere
 - Sharper Vertical Resolution using Line Wings
 - Spectral Resolution > 700:1 is Sufficient
- Mid-Trop. CO
- Mid-Trop. N₂O
- Moisture in Planetary Boundary Layer
- Moisture Profile in Lower and Middle Troposphere
 - WV Motion Vector Winds
- Clouds
 - Cloud MV Winds


MISTiC Winds IR Spectral Sounding Instrument Concept

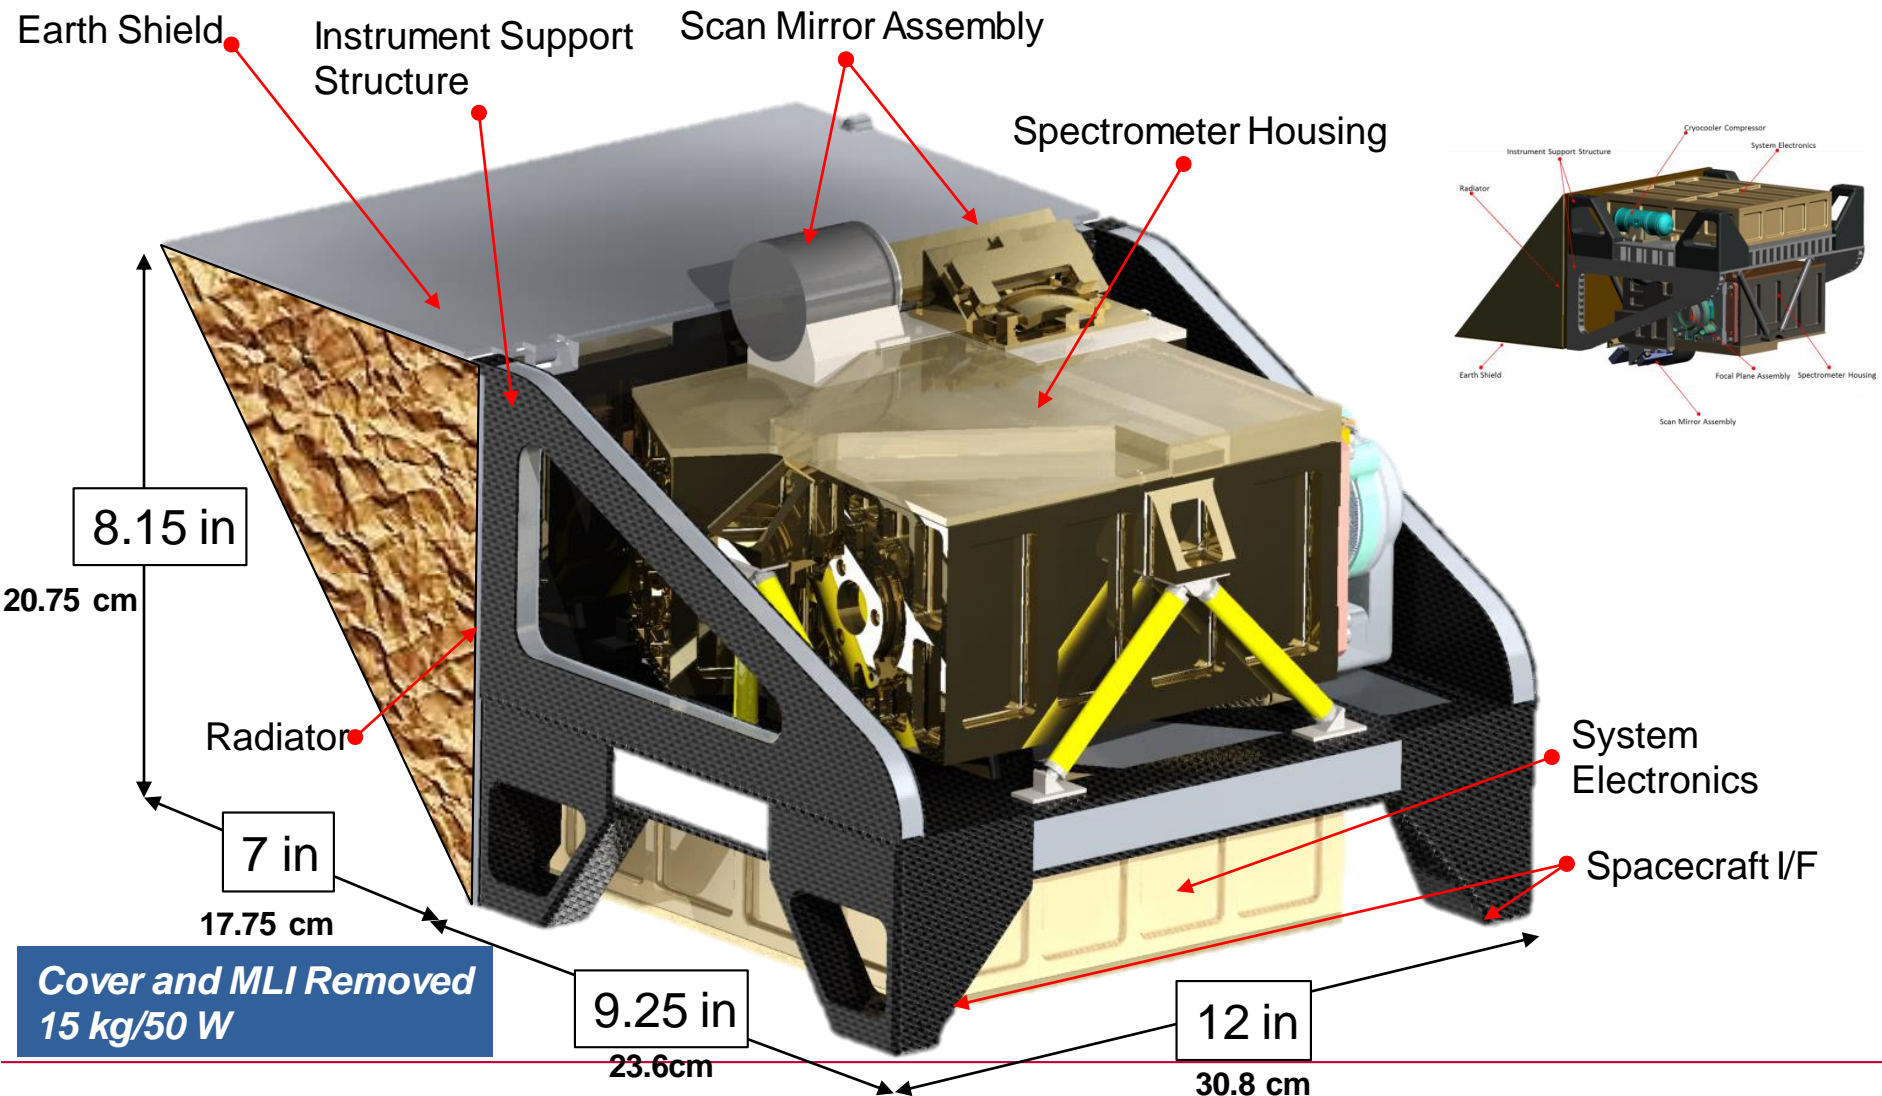


Not export controlled per ES-C4ISR-030718-0037

Primary Efforts under NASA IIP Address Instrument Concept, Technology and Measurement Challenges (Continued)

- ✓ Space Mission concept development
- ✓ Technology Risk Reduction
 - Challenge: Get a higher operating temperature FPA in order to reduce cooler power
 - Benefit: Large reduction in SWAP
 - Approach: Use of new APD-Class MWIR FPA
 - Risk: APD Array Not Yet Tested in Space Radiation Environment
 - Mitigation: Radiation Testing on IIP (by 9/15)
- Observation Method Risk Reduction (IN PROGRESS)
 - Challenge: Application to Highly Vertically Resolved (3D) MV Winds is highly plausible-but not demonstrated
 - Benefit: MV Winds at Low Cost -> Better weather forecasting
 - Risk: Tracer De-correlation Behavior at finer vertical resolution unknown in detail
 - Mitigation: Airborne observations of Tracer De-Correlation Times & Behavior





The MWIR HgCdTe Avalanche Photodiode-based IR Focal Plane Array Detector selected for MISTiC allows high-sensitivity hyperspectral measurements at 85K

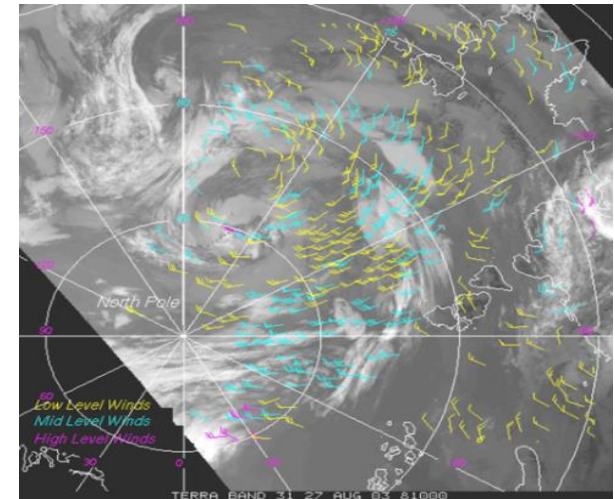

MISTIC™ Winds Tracers Features Would Have Better Vertical Resolution Than MODIS Winds

Airborne Testing of MISTiC Spectrometer on the NASA ER2 Platform Reduces Observing Method Risks

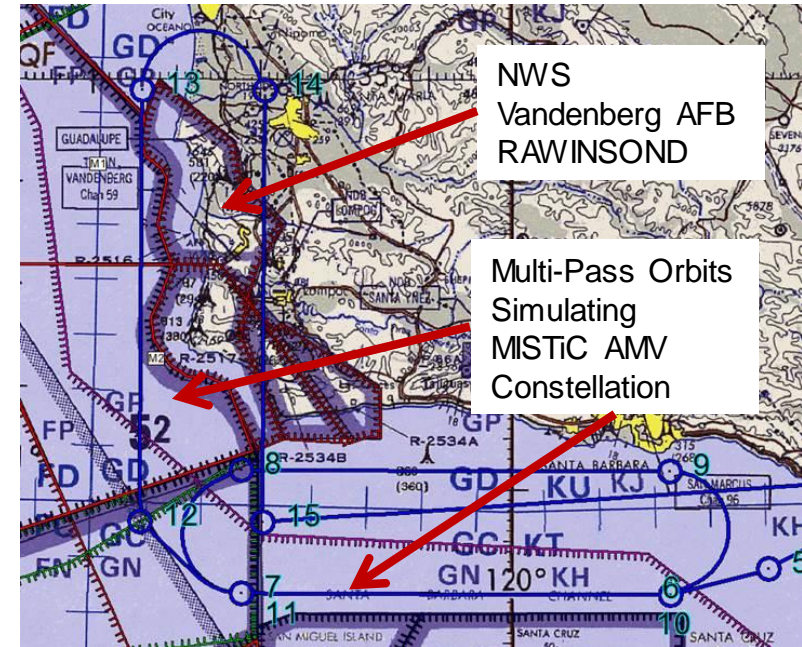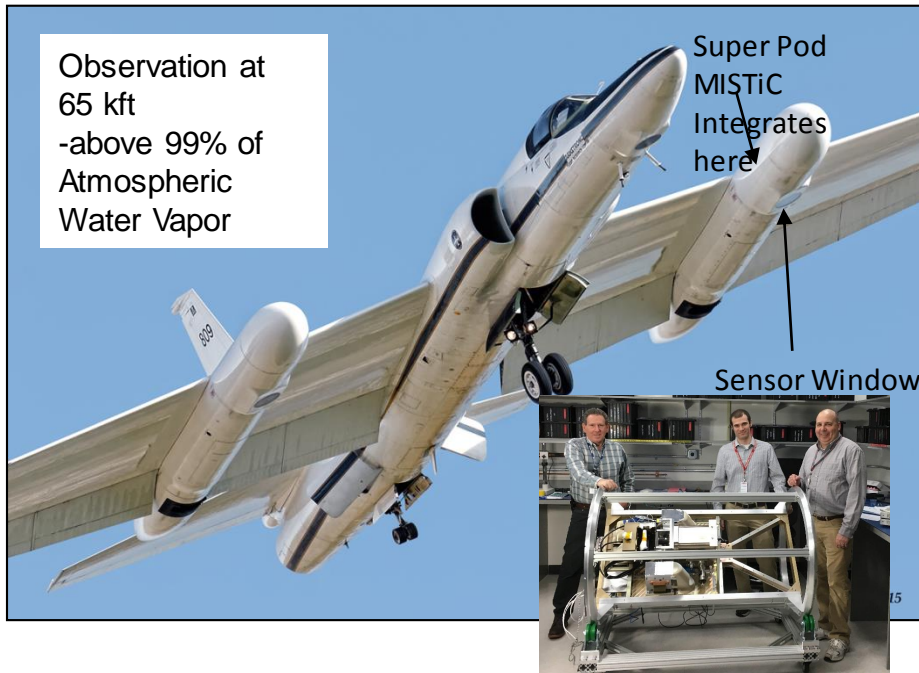


Airborne Spectrometer Very Similar to Space Instrument--with these differences:

- Off-the shelf APD FPA, Filter ($\lambda_{co} \sim 5.4\mu\text{m}$ vs 6)
- Active Cooling of Spectrometer- (in Vacuum Vessel)
- POD Window (outside cal. loop)
- (rugged) COTS electronics, coolers, etc

MISTiC and Independent Observations

- IR Imaging/Sounding Spectroscopy
- Visible Context Images
- NWS RAWINSONDEs
- METSAT Obs (IASI A,B, AIRS, GOES West (?GOES 16?))


Airborne MISTiC Instrument Acquires Hyperspectral Imagery to Capture Atmospheric Motion Vectors

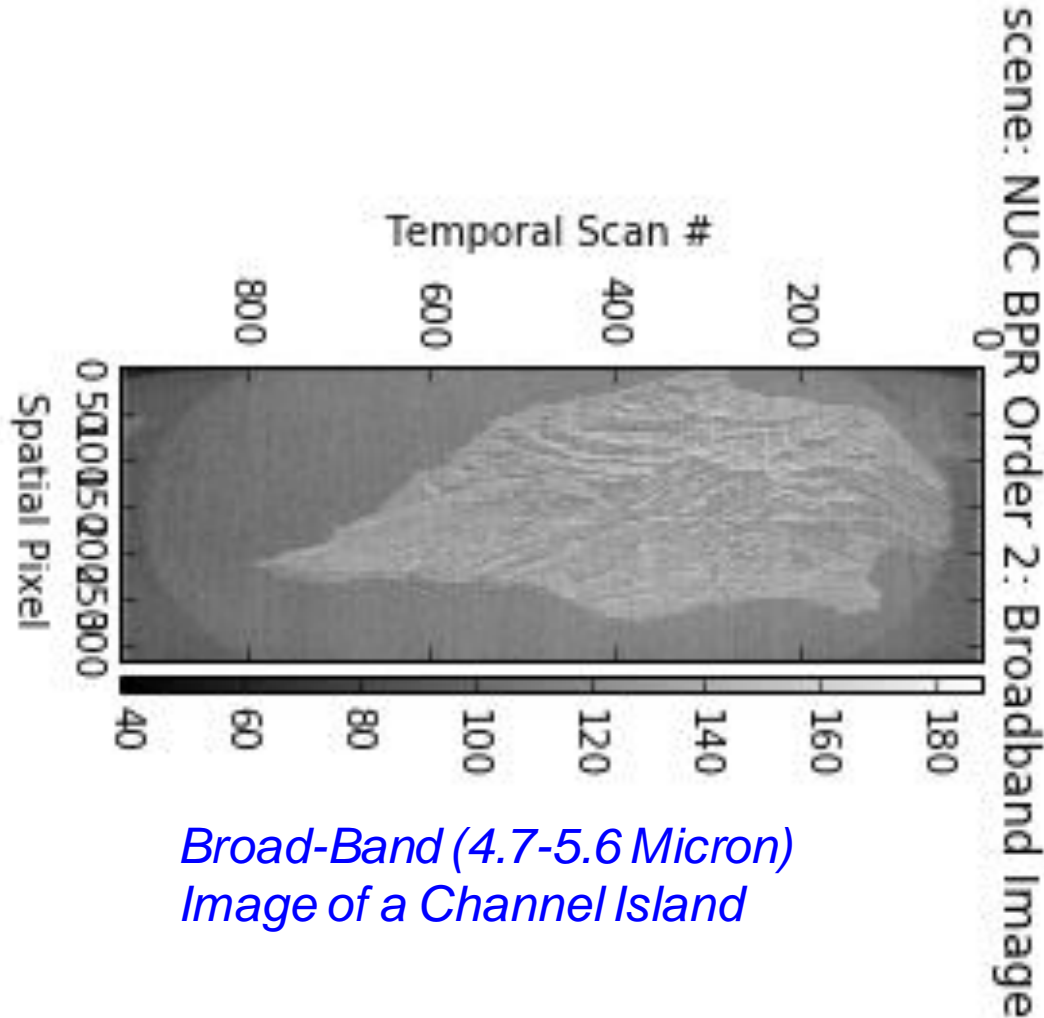

- Observations of a Constellation Simulated by Repeat-Looks from ER2
 - 15-20 min Orbits
 - 6 min Straight Segments
 - 65 kft Altitude Above 95+% of Atmospheric Moisture
 - 50-m GSD Pixels Aggregated to MISTiC Wind Space GSD (1.3 km @ nadir)
 - Slit Scanned Along Direction of Travel

Low-Lying Cloud Decreases IR Radiance –Selectively


Sweep 18 Order 2 Block Average Spectra for Clear(A8) and Cloud-Containing (C8) Blocks

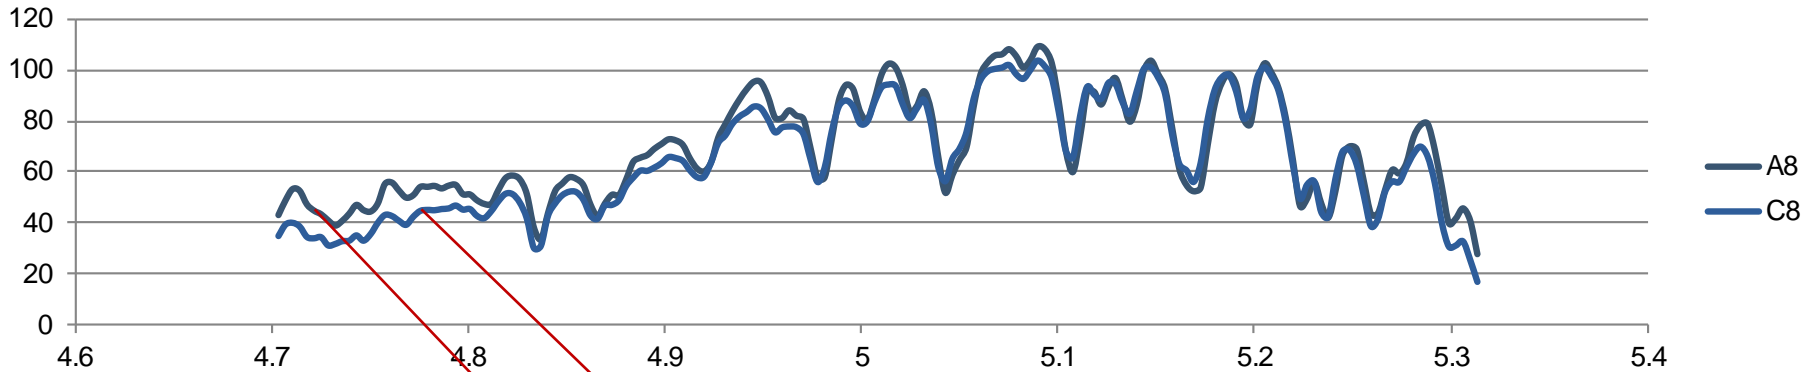

5.01 μm Spectral Channel Image

- Cloud tops are colder than ocean surface
 - Lower Radiance
- Low cloud temperature close to surface temperature (low thermal contrast)


Spectrum for a 3 km Footprint over Ocean Near Channel Islands for MISTiC Winds Moisture-Band

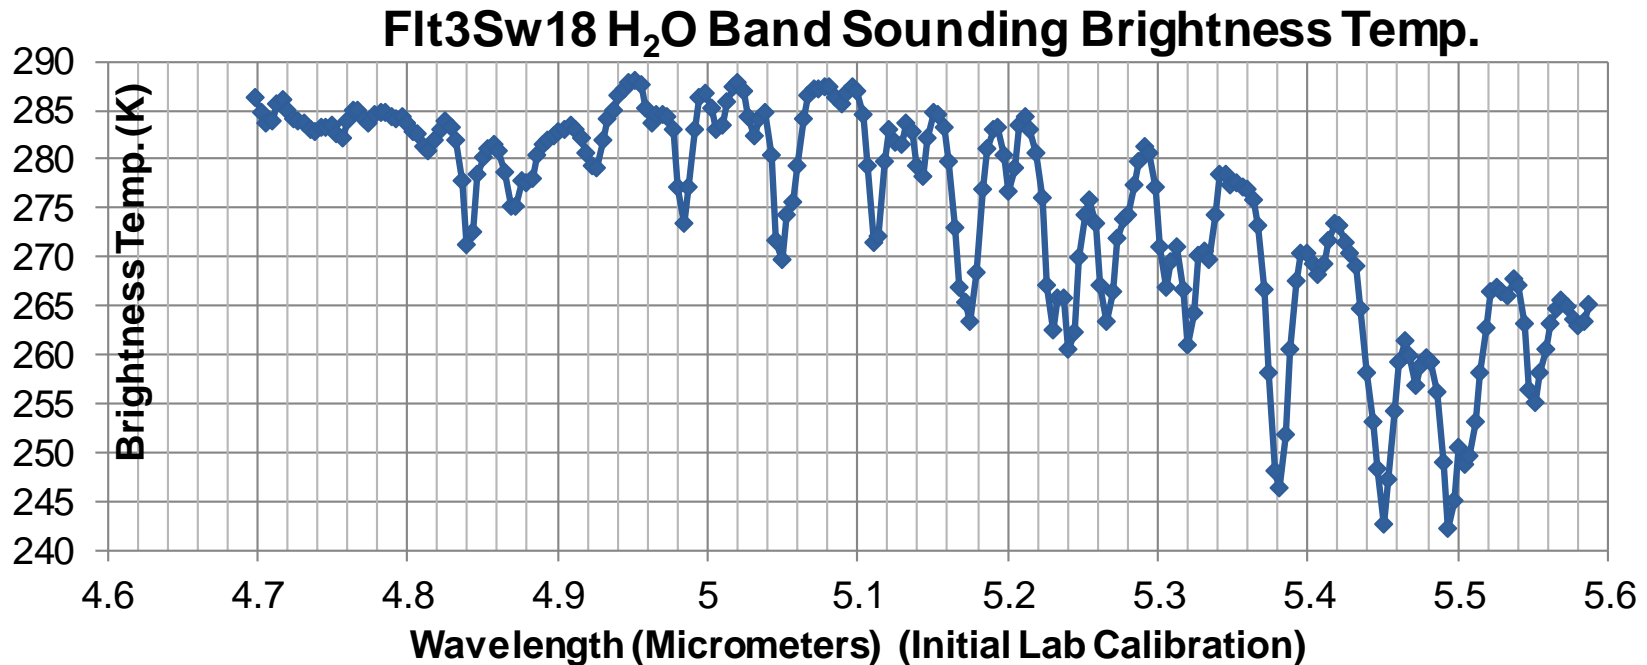

- Initial Radiometric Calibration:
 - 2-Point (-10C and 25C Blackbodies)
 - Calculated Transmission Correction for ER2 SuperPod Window
 - Window Emission—temperature-monitored, (but not yet included)
- Initial Spectral Calibration—Monochrometer at Room Temperature


Spectrum for a 3 km Footprint over Ocean Near Channel Islands for MISTiC Winds Temp.-Band

Flt3Sw18 Temp. Band Sounding Brightness Temperature (Nadir)

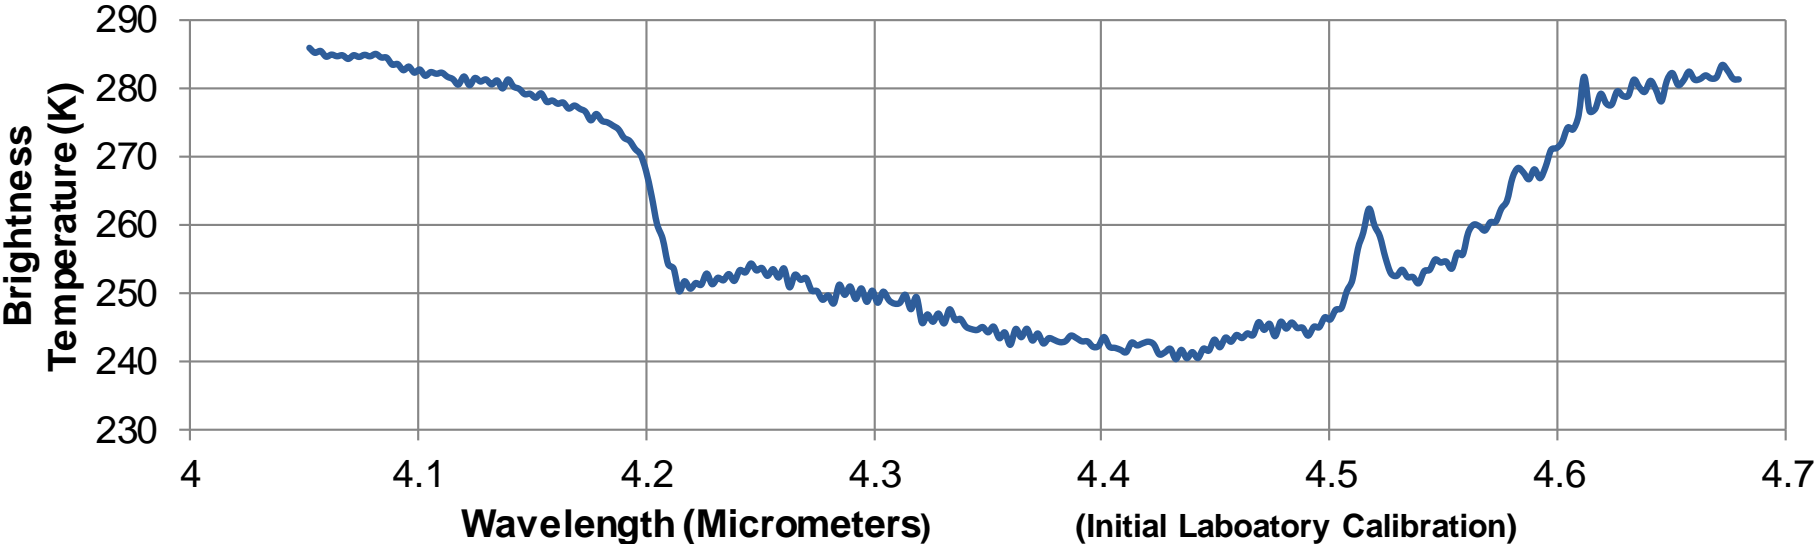


- Initial Radiometric Calibration:
 - 2-Point (-10C and 25C Blackbodies)
 - Calculated Transmission Correction for ER2 SuperPod Window
 - Window Emission—temperature-monitored, (but not yet included)
- Initial Spectral Calibration—Monochromator at Room Temperature


Primary Critical Atmospheric Emission Spectral Features Observed in MISTiC Winds Airborne Observation

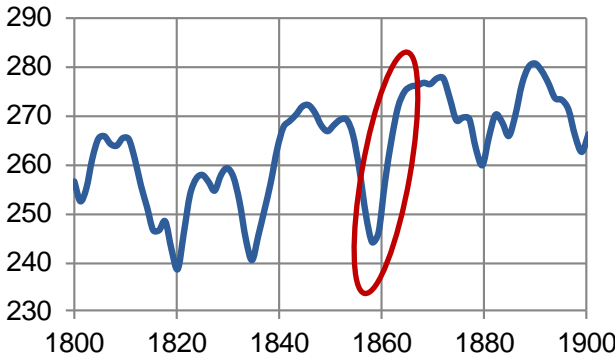

Spectral Edge Response Consistent with Resolution ~600 in Key Mid-Trop WV and Temp Sounding Regions –close to 700 design goal

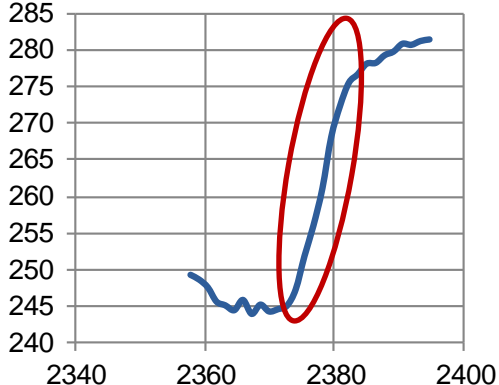


iasi.20171204.363.MetOp.day near W120.2 +33.7

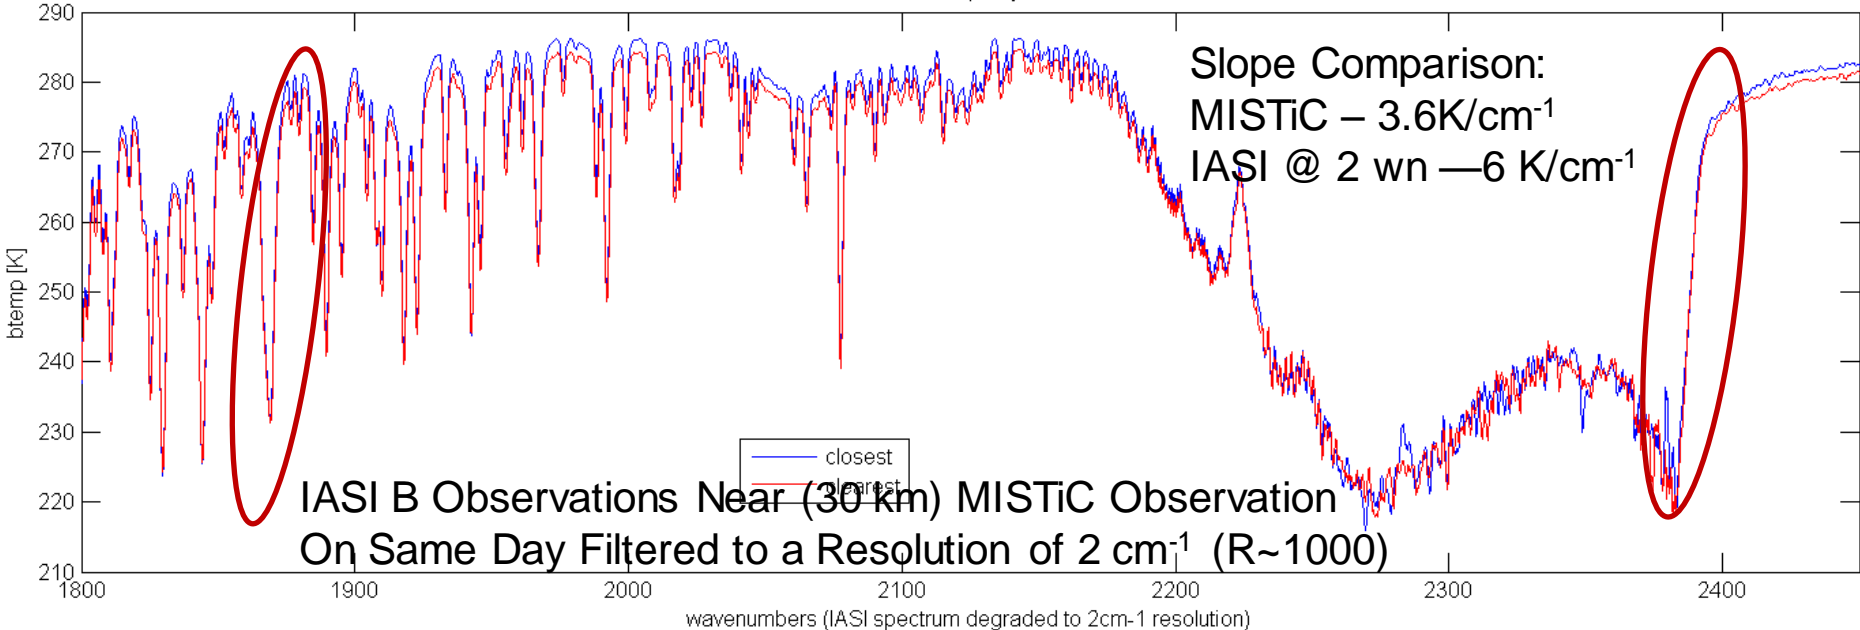

Example Observation of a “Wind Tracer” in MISTiC Airborne

- MISTiC observes the wind by observing the shift in location of features in the cloud and moisture fields
 - MISTiC’s innovation is to do this with a hyper-spectral instrument, and the different spectral channels see the scene in different ways—depending on the details of moisture and carbon dioxide emission for that spectral channel.
 - These differences, ultimately, relate to height assignment for the feature
 - Initial Observations identify a cloud with unique spatial features—and observed it at different locations during different observation periods from the ER2
 - ~ 1000 seconds elapse between observations, allowing wind to move the feature
- A unique bar-pattern cloud feature (group) was observed multiple times during the recent MISTiC flight—over a sight just south of the Channel Islands-west of LA
 - After accounting for changes in ER2 position and image scan start/stop times, the features have shifted ~ 4 km to the east, and ~ 4.5 km to the south from one observation pass to the next. → Speed of 6.2 m/s from 312 degrees
 - Feature velocity reasonably matches that of wind at ~ 9000 ft from the Northwest-as indicated by radiosondes launched from near-by Vandenberg AFB— $\Delta V \sim 2$ m/s, $\Delta \phi \sim 3$ deg.


Sw 13 and Sw 28 Band 80—showing Banded Mid-Level “Cloud Tracer”

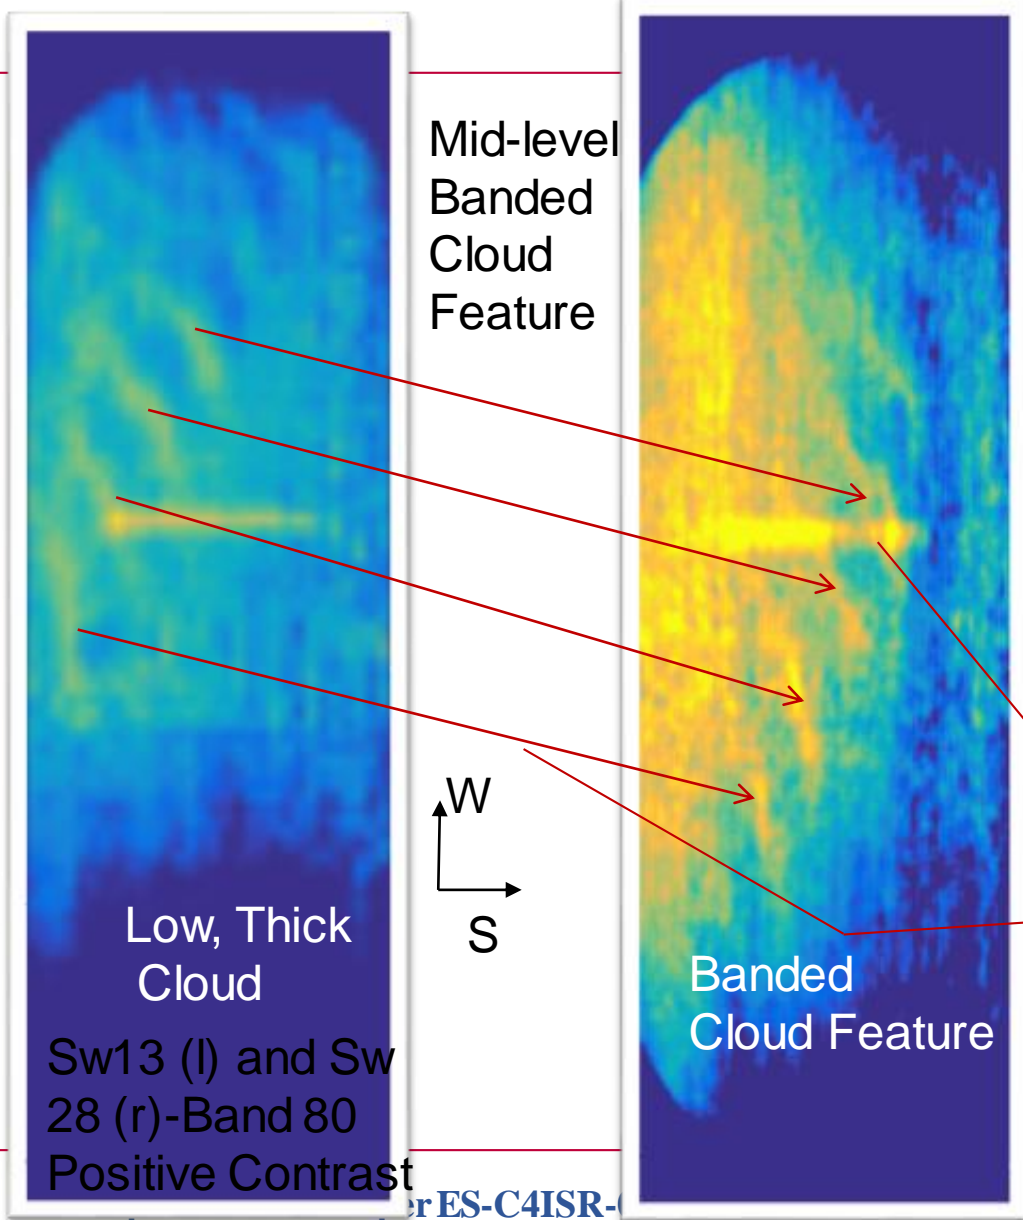

Cloud Feature Position Change Corresponds to Wind Speed of 6.2 m/s at 312 degrees

Sweep 13 Pixel		Sweep 28 Pixel	
X-tr	Al-tr	X-tr	Al-tr
57	363	145	604
95	316	183	511
145	262	224	454
200	206	220	305

Instr. Window Artifact

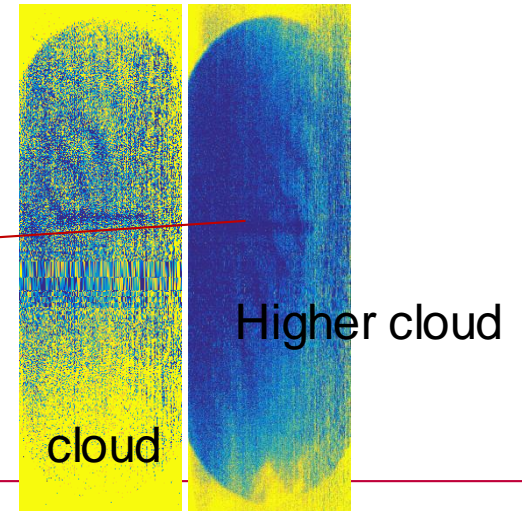

Sw13 (l) and Sw 28 (r)-Band 80 Neg Cont

4 December MISTiC (Airborne) Flight on NASA ER2 Over Southern California and Adjacent Coastal Waters

orbit 1:

- south edge: 11-17,26-32,41-46
- north edge: 19-24,34-39

orbit 2:


- east edge: 50-55,65-70,80-85
- west edge: 57-63,72-77

orbit 3:

- north edge: 97-103,112-117,127-131
- south edge: 104-110,119-125

orbit 4:

- east edge: 137-142,152-157,166-171
- west edge: 146-150,159-164

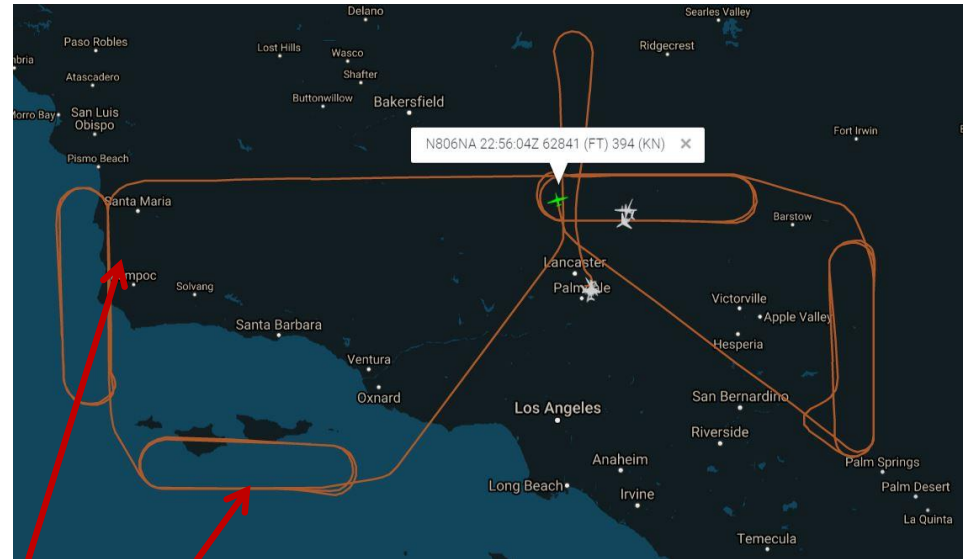


Sweep 13 (Ocean, Cloud, and Moisture Field)

Infrared Hyperspectral (and Visible Broad-band) Observations near Eastern-most Channel Island and Nearby Ocean


Vandenberg Radiosondes at 11:30 Z, 17:30Z, 20:30Z

Rawinsondes Launched from Nearby Vandenberg AFB Show Both the NW Wind Driving Higher Cloud and East Wind Driving Lower Cloud

4 December 17:50 Z Temperature/Dew Point

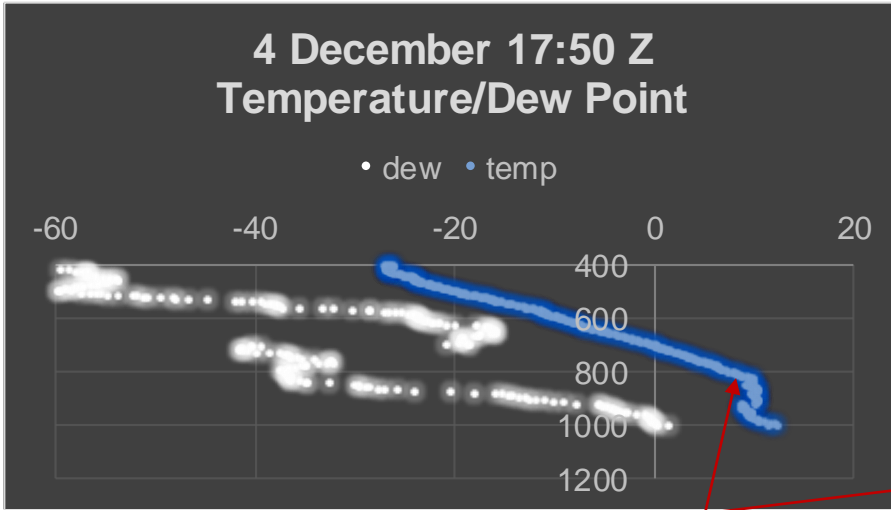


4 December 20:30Z Temperature/Dew Point

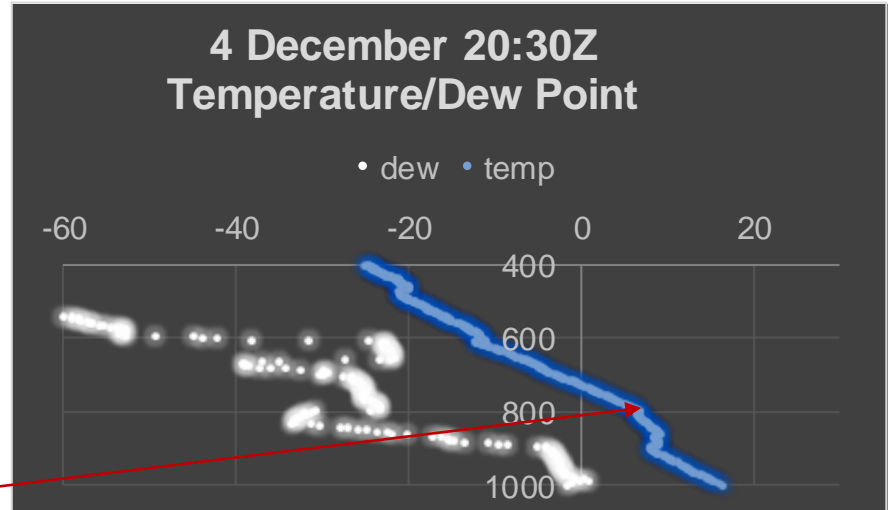


Cloud Feature Velocity Observed by MISTiC Airborne (ER2) Consistent with Sondes

4 December 17:50 Z Winds


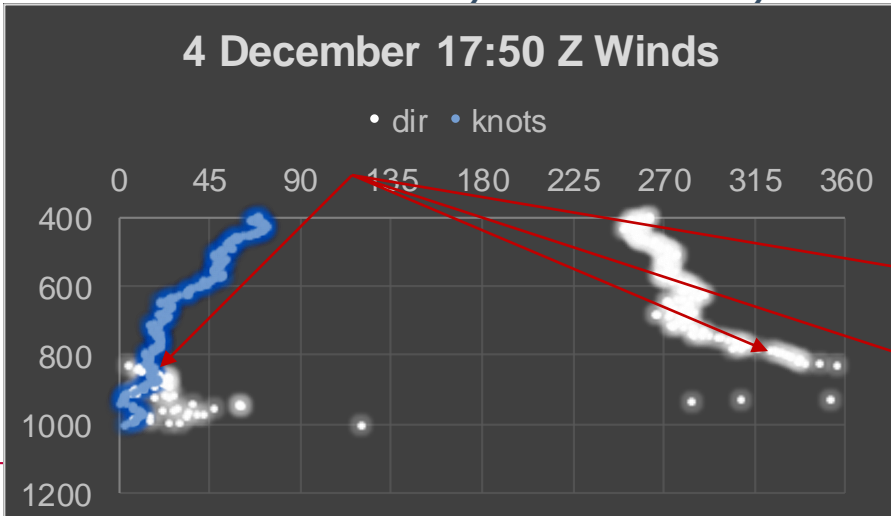


Wind Speed/Direction 4 December 20:30Z

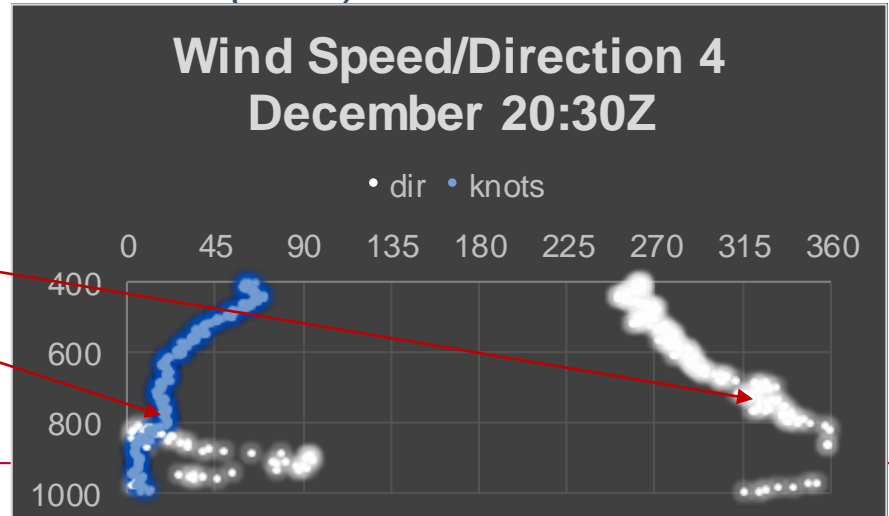


Not a report controlled per IS O 15000 000/10 000/

Sweeps 22 and 36, which contain a cloud tracer that moved ~ up(north) and left (west) Window Band Group (Ch 1-27, or ~4.7-4.8 μm)

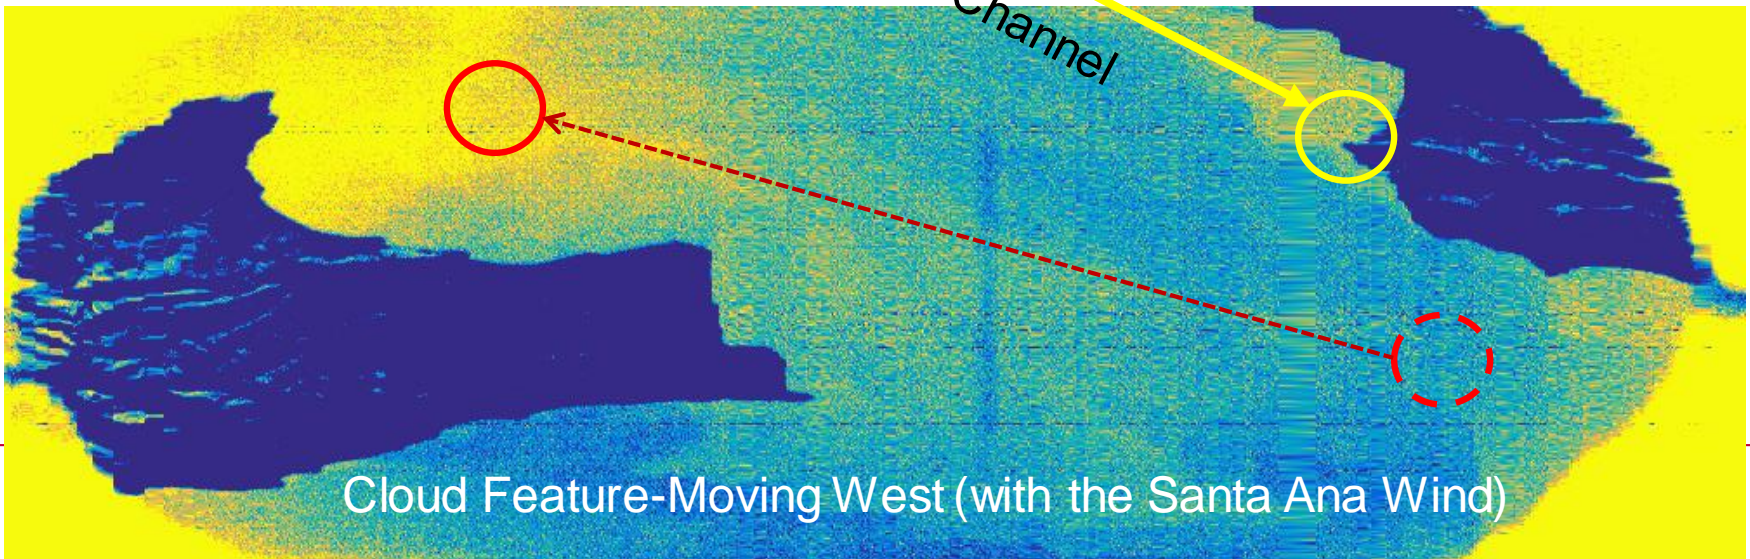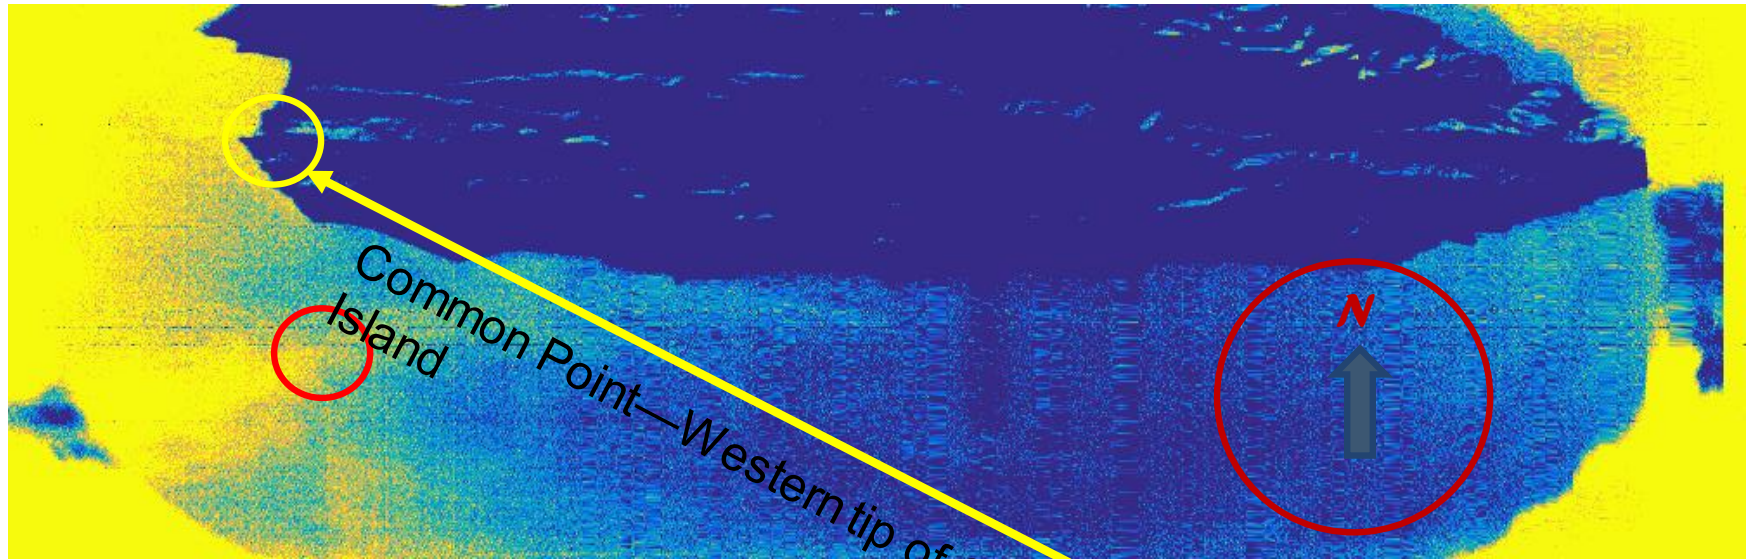


MISTiC™ Winds-A Miniature High Vertical Resolution Infrared Sounder for 3D Winds and Frequent IR Soundings

- Miniature Spectrometers Enabled by:
 - Optimized Low-Impact Spectral Channel Selection Proven through a Decade of NASA's AIRS Experience
 - Innovative Opto-Mechanical/Thermal Design Minimizes S/C Resources Needed to Cool IR Spectrometer
 - Advanced Large-Format IRFPA, Miniature Cryocooler, and Electronics
 - *All Technologies TRL-5 or Higher*
- Compact IR Sounder Design, Mature Algorithms and Technologies Enable:
 - Payload Hosting on a Micro-Satellite for a Low-Cost Total IR Sounding Mission
 - ~1 km Vertical & ~3 km Horizontal Resolution (@Nadir) in the Troposphere
 - Temperature, Moisture, Wind Profile


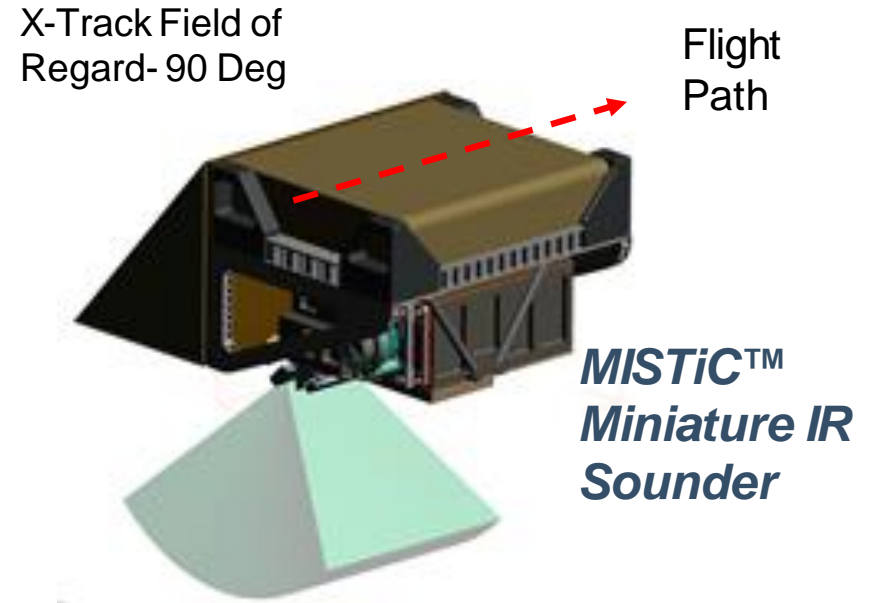


Micro-Sat with Miniature IR Sounder Payload

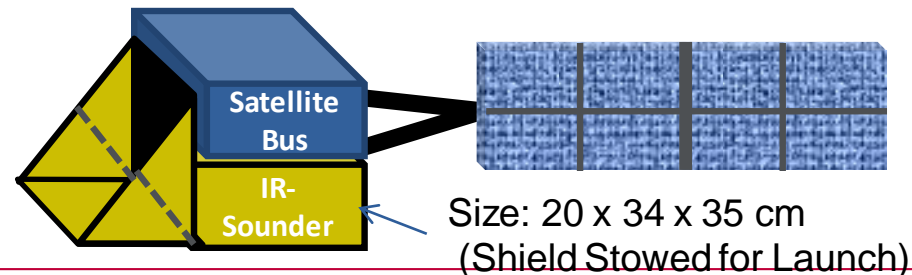

Supplemental Material

4 December 2017 Vandenberg 11:30 Z Sounding

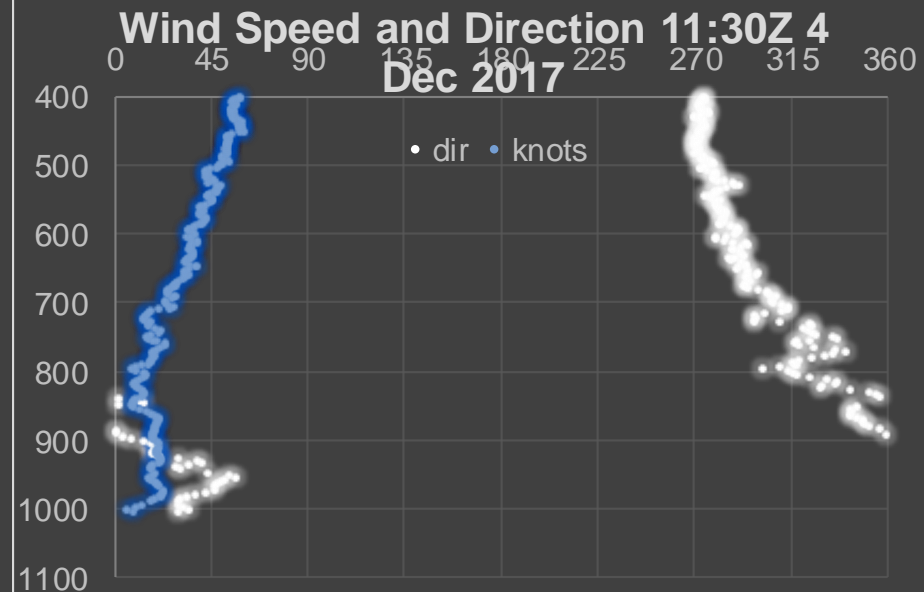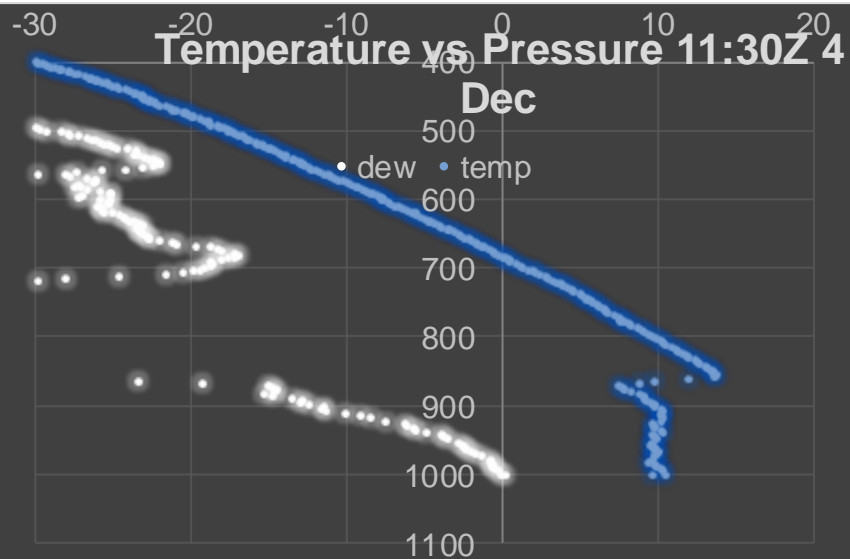

- Sounding During the Early AM (PST) Shows Strong Temperature Inversion, and NW Wind Consistent with MISTiC Airborne Observation of Wind Tracer at ~ 800 mB


Tracer Example Observation Location (Observation Nadir Point)

Time of Observation: ~ 11:30, 11:30 + 1083 sec Pacific Time


Orbit 1 –West-bound (deg)	Longitude (deg)	Latitude (deg)	Heading
• Sw13 (pass 1)	-119.670779	33.757959	-88.59
• Sw28 (pass 2)	-119.705720	33.755339	-88.84

Sweep 22 Selected Water Vapor-Band Images - Show Differences Vertical Information Content


Surface-Dominated (High Brightness Temp.) Band

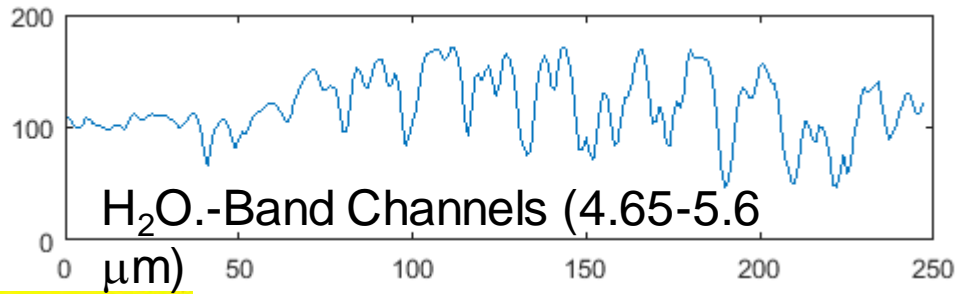


→ Decreasing Brightness Temperature

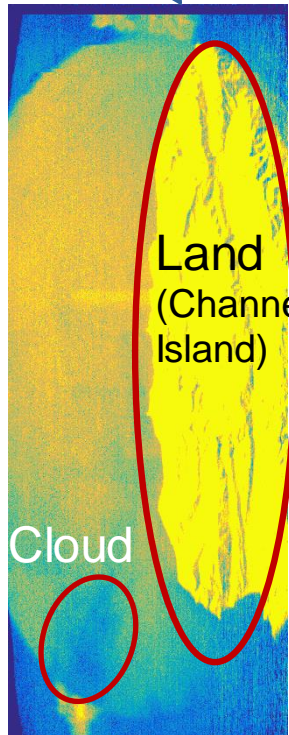


112

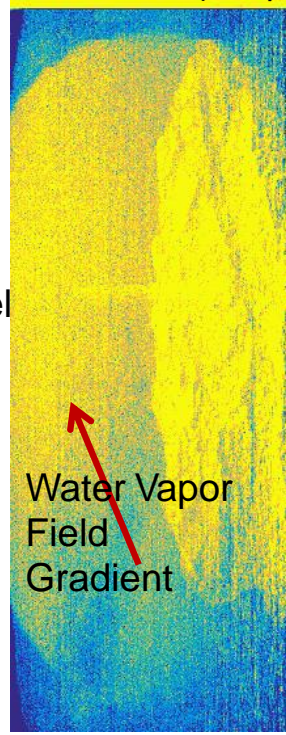


80

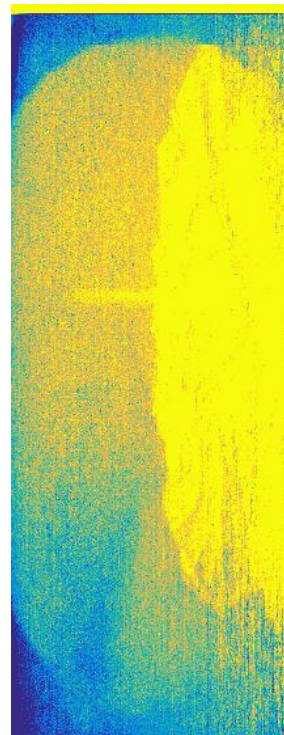


116

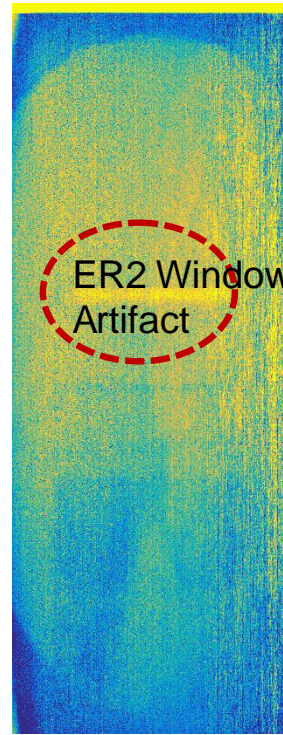

133

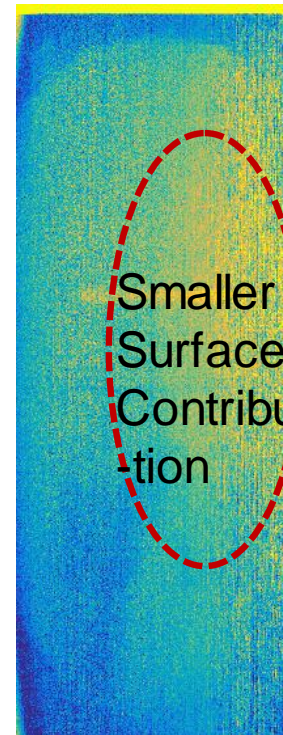


152

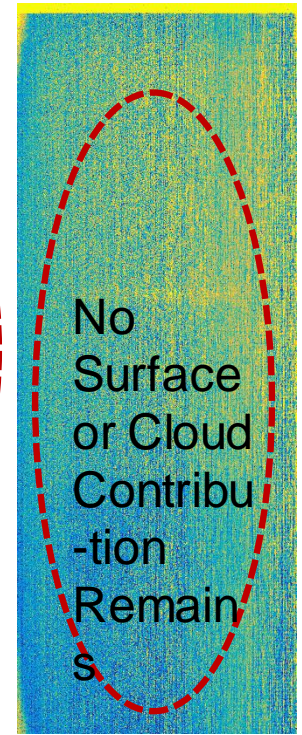

191


Selected H₂O (Water Vapor)-Band Channels

Sweep 22 Selected "Temperature"-Band Images - Show Differences in Vertical Information Content with Band

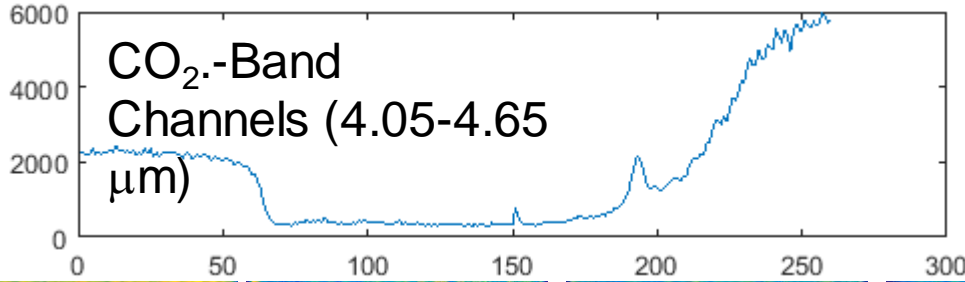

←
Decreasing
Brightness
Temperature

Surface-Dominated (High Brightness Temp.) Band

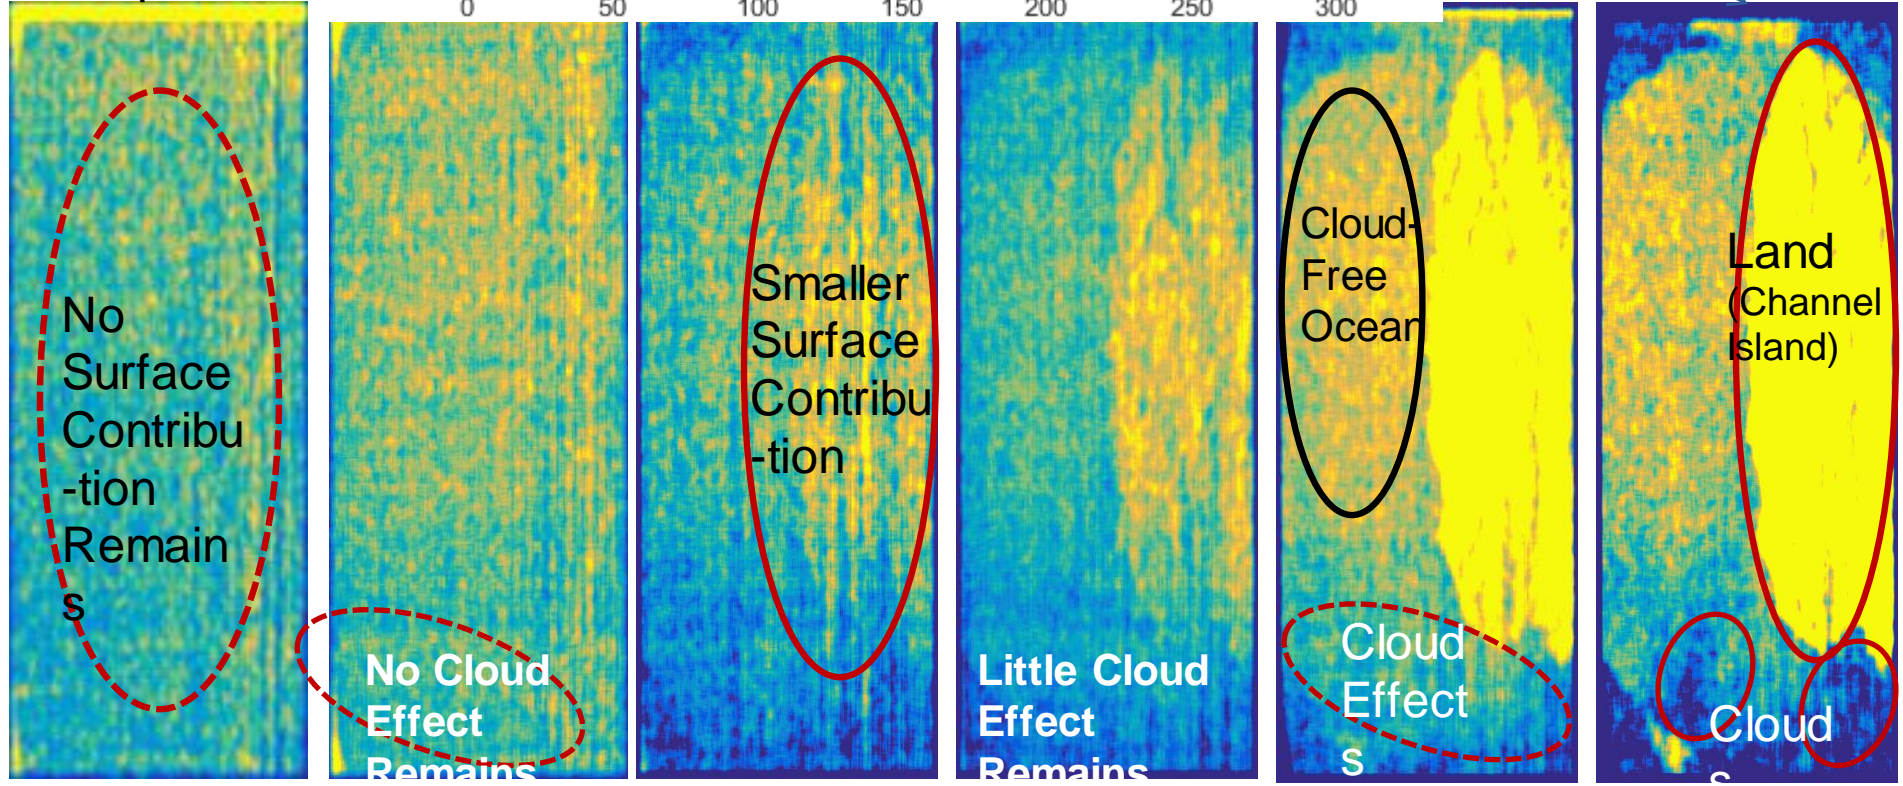

Selected CO₂ (Temperature)-Band Channels

MISTiC™ Winds Level 1 Instrument Performance Characteristics and Level-2 Sounding Data Quality (updated)

MISTiC™ Key Instrument Performance Characteristics

Characteristic	Value	Comments
Minimum Spectral Frequency	1750 cm ⁻¹	5.72 μm
Maximum Spectral Frequency	2450 cm ⁻¹	4.082 μm
Spectral Sampling	~ 2:1	<590 spectral samples
Spectral Resolution @ minimum	>700 :1	$v/\delta v$ ((comparable to CrIS-Apodized)
Spectral Calibration Knowledge	1/100,000	$\delta\lambda/\lambda$
Angular Sampling	1.6 mr (cross-dispersed)	1.38 km (@ Nadir)
Orbital Altitude and Orbit	705.3 km	Polar/Sun-Synchronous
Angular Range (cross-track)	1570 radians	90 Degrees—Same as AIRS
Spatial Resolution	<3.0 km (geometric mean)	@ Nadir
Radiometric Sensitivity	<200 mK (max)	(<150 mK @ 2380 cm ⁻¹)
Radiometric Accuracy	<1%	@ 300K Scene Background

Key Sounding Data Product Characteristics,

Vertical Resolution—Temperature	~ 1 km	In Lower Troposphere
Layer Accuracy	~ 1.25 K	In Lower Troposphere
Vertical Resolution—Humidity	~ 2 km	In Lower Troposphere
Layer Accuracy—Humidity	~ 15 %	In Lower Troposphere

- MISTiC™ Data Quality Requirements Similar to those Demonstrated by NASA’s Successful AIRS Instrument

- Spectral Resolution
- Spectral Calibration Stability
- Radiometric Sensitivity/Accuracy
- Reduces Spectral Resolution (rel to AIRS) Consistent with CrIS Info. Content

- Spatial Resolution Notably Finer than AIRS Resolution (13 km @Nadir for AIRS)
 - 3.0km @ Nadir
- Reduced Spectral Range Enables Major SWAP Reduction

Key MISTiC 3D Winds System (of Systems) - Level Performance Requirements (draft)

KPP	KPP Attribute	Requirement
3D Motion Vector Winds (Moisture and Cloud Motion Vectors)	Layer Wind Speed Uncertainty	< 2 m/s rms
	Layer Wind Direction Uncertainty (above 10 m/s)	< 10 degrees rms
	Layer Height Pressure Height Assignment Error	<30 mB
	Layer Effective Vertical Thickness	<100 mB
	Minimum Pressure of Highest Pressure-Level	<350 mB (MMV) <500 mB (CMMV)
	Tracer Potential Density (Cloud-Free Conditions for MMV, Cloud Contrast for CMV)	>1 per 6 km sq per vertical layer :
Temperature Vertical Profile	Layer Effective Vertical Thickness	>100 mB (~ 1 km)
	Layer Temperature Accuracy	>1 K
	Sounding Measurement Potential Density	> 1 per 6 km sq
ObsFrequency	Observation Refresh Period	<3 hours (4 planes)

MISTiC Winds Observes both Total Wind Velocity Vector and the (via IR Sounding) the Geostrophic/Gradient Wind Vector Component in ≥ 6 Layers

MISTiC™ Winds' Concept Based on Proven Science From Current Flight Instruments

MISTiC™ Winds' Vertical Temperature Profile Retrieval Comparable to AIRS & CrIS in Lower Troposphere

- Vertical Temperature Profile Retrieval Accuracy for Two Different Quality Control Thresholds Shown
 - Using All AIRS Channels—solid curves
 - Using SWIR/MWIR-Only –dashed curves


Additional Error experienced is modest using only SWIR/MWIR Channels

- ≤ 0.1K Added Error in Lower Troposphere
- NOTE-AIRS Version 6 Algorithm Primarily uses /SWIR MWIR Channels for Sounding, using LWIR Channels only for Cloud-Clearing

Fine spatial resolution (~ 3 km @ nadir) a new benefit

- Yield of Cloud-Clear Observations much higher for MISTiC than for CrIS, IASI, and AIRS
- Increased Cloud Contrast in Partly Cloudy Scenes

AIRS/AMSU Retrievals
Global Cases for July 10, 2012
Layer Mean RMS Temperature (K)
Differences from "Truth"

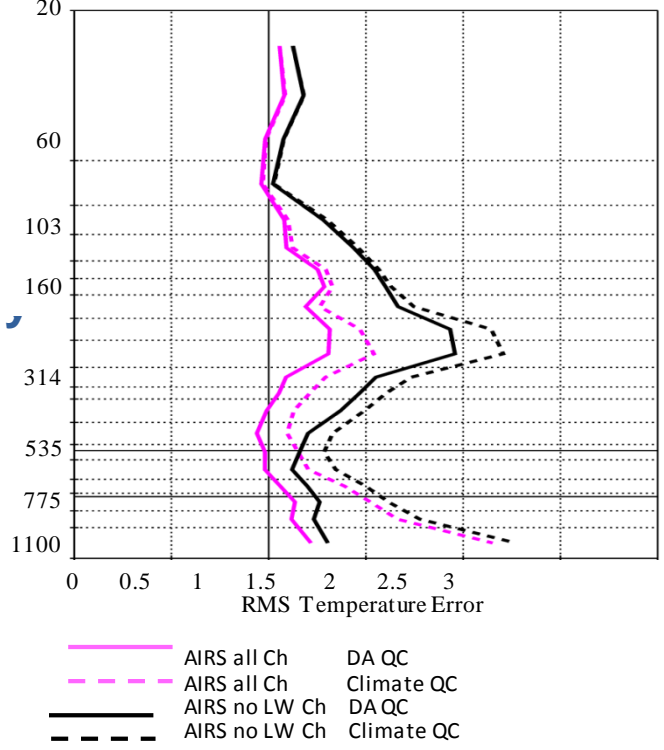

(from Joel Susskind NASA GSFC)


MISTiC™ Winds Retrieval Simulation Validates Chosen Spectral Range

- 1650-2450 cm⁻¹
- 1750-2450 cm⁻¹
- 1850-2450 cm⁻¹
- 1950-2450 cm⁻¹


- Reasonably accurate temperature sounding can be done, using just the 4.2 micron band of CO₂, up to about 200 mb
- Water vapor retrieval accuracy best at 1650 cm⁻¹ but good enough at 1750 cm⁻¹ spectral cut-off validating MISTiC™ Winds spectral range selection

(from NASA GSFC
Sounder Research Team)

1 Km Layer Temperature (K)
RMS Differences from Truth

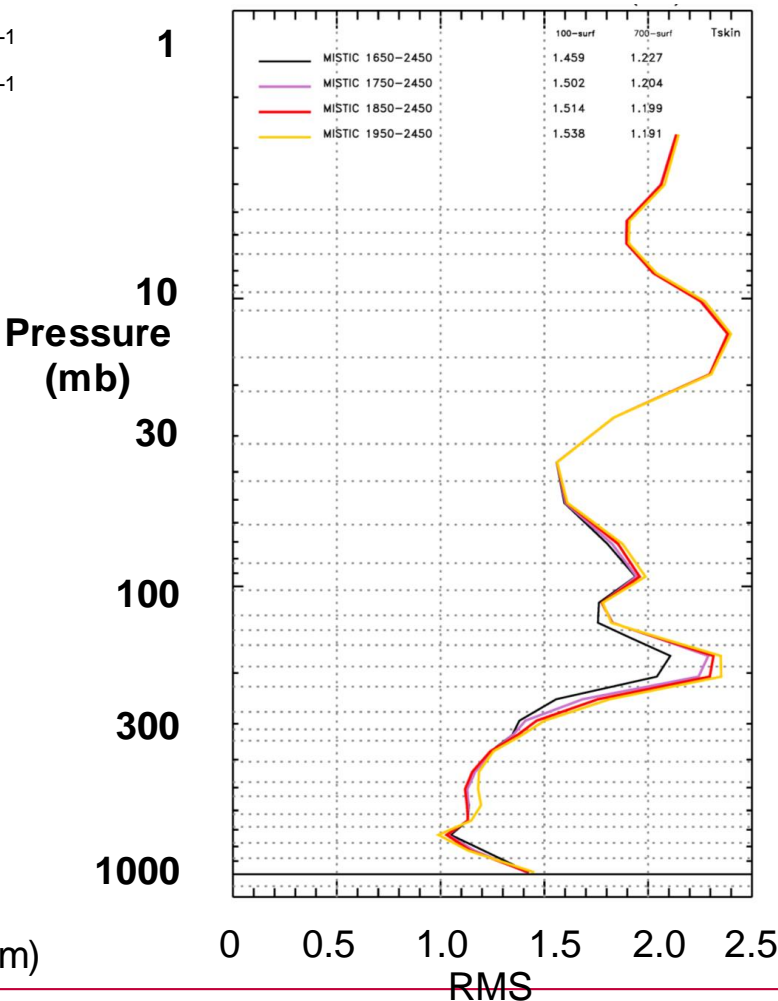


1 Km Layer Precipitable Water RMS
% Differences from Truth

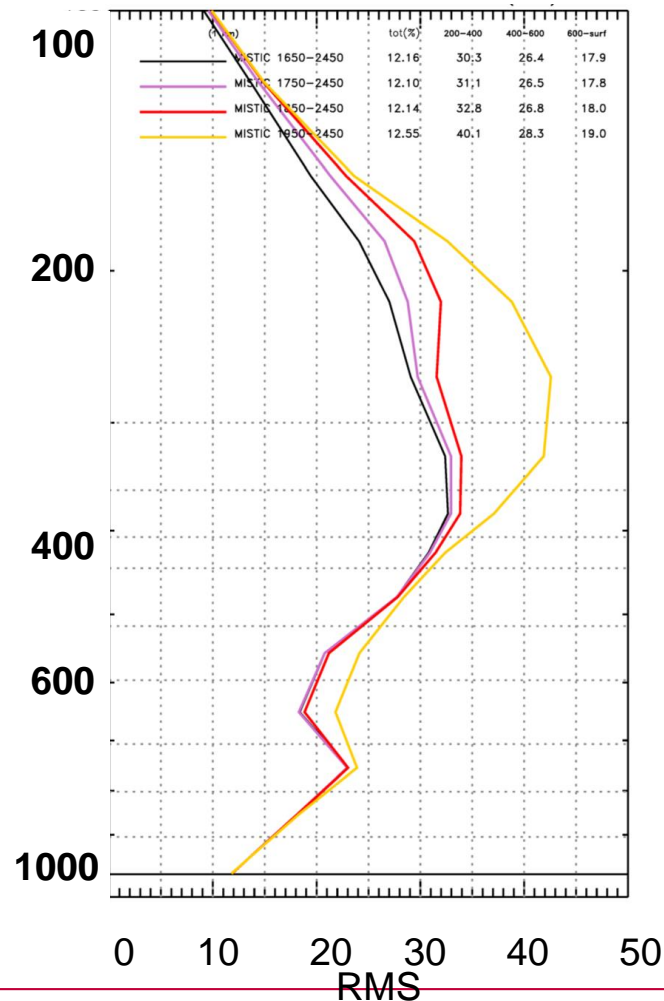


MISTiC™ Winds Instrument Radiometric Sensitivity Performance Estimates Show Solid Margin Against Requirements

Sounding NEdN vs Wavelength:

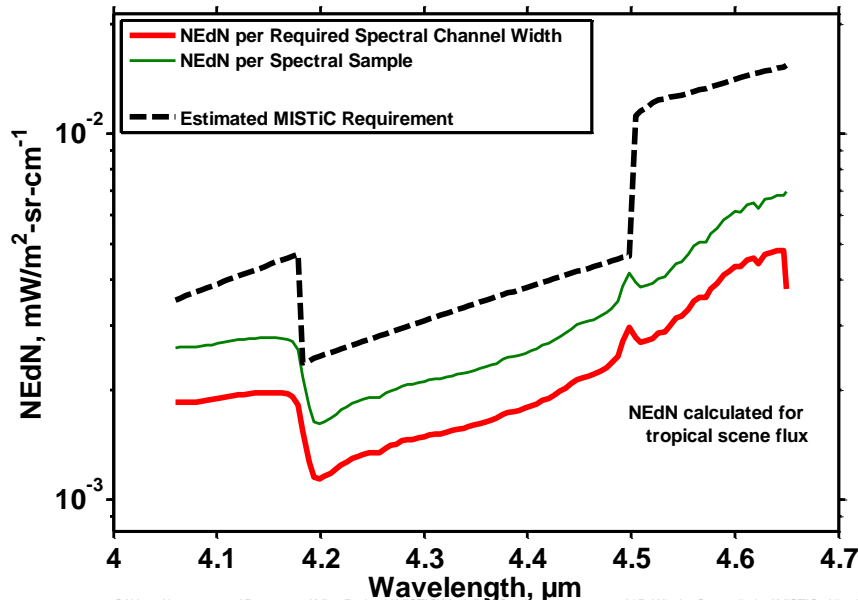

Sounding NEdN vs Wavelength:

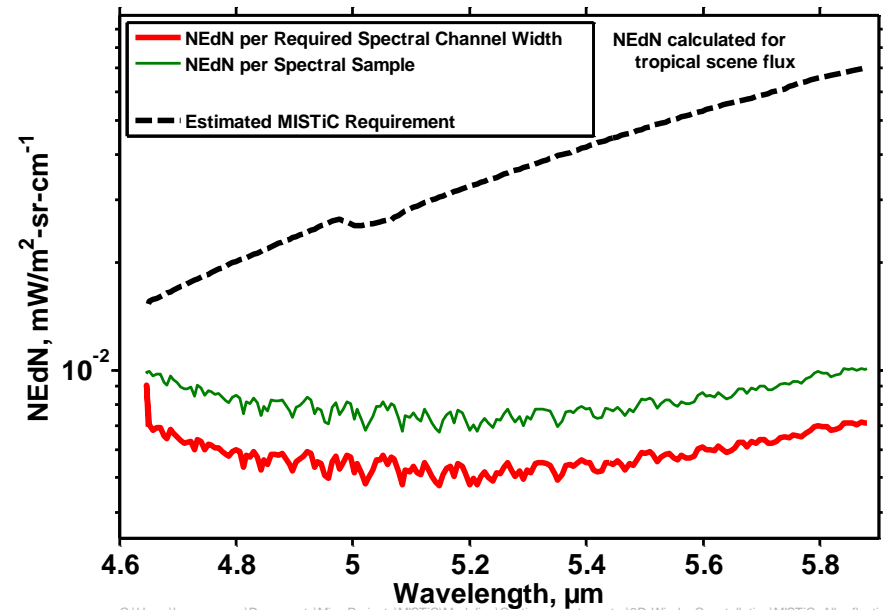

- Spectrometer Radiometric Modeling Methods Developed for AIRS, GOES-R HES, etc used to Estimate MISTiC™ Winds Instrument Sensitivity
- Sensitivity Similar to AIRS (<200 mK @ 250K Scene) for low brightness temperature regions near 4.2 μm
- Updated APD detector noise modeling still be included in system model
 - APD FPA Vendor-modeled dark current and noise are in acceptable range for MISTiC™ at 90K